


## SHEETING LAYOUT GRID

Panel = TYPE-R, Base Metal = STEEL, Thickness = 0.50mm., Color = FROST

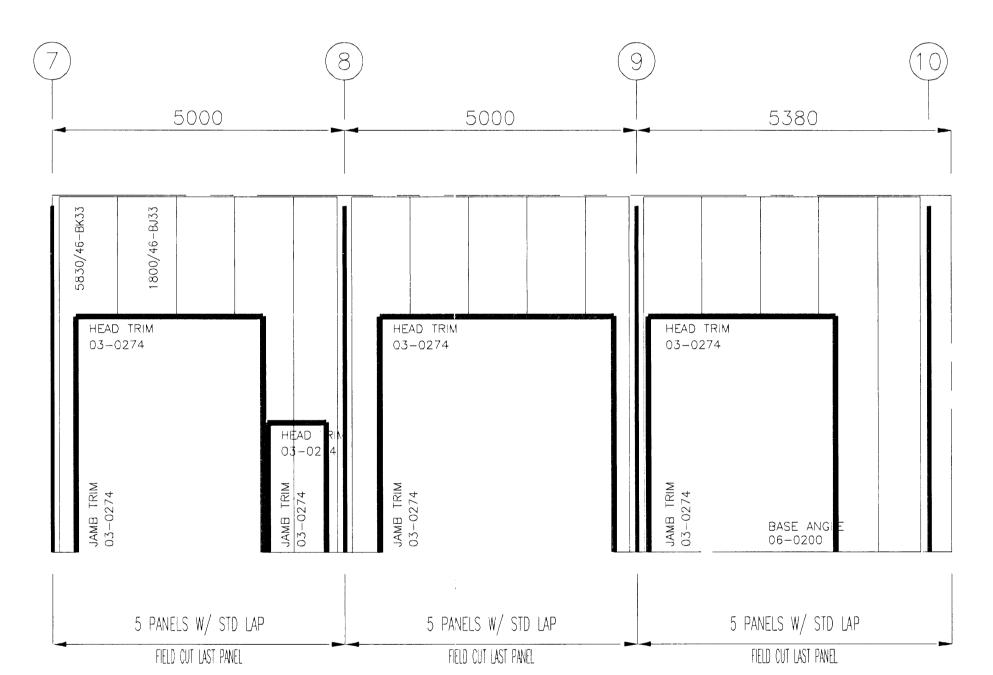

SI	DEWALL	LIN		R	SH	EE	TING
	LAYOUT		G	R			A

-WALL PANEL

WALL LINER DETAIL @ CORNER (RF END)

Panel = TYPE-R, Base Metal = STEEL, Thickness = 0.50mm

WALL PANEL

POP RIVET

600 mm 0.0

F.O. JAMB TRIM (03-0274)

WALL PANEL-

─\_F.O. JAMB

LINER DETAIL @ FRAMED OPENING (FROM FFL)


WALL PANEL


SPACER (03-0251)-

(IF REQD.)

WALL LINER PANEL-(TYPE-S/R)

ENDWALL LINER  03-0251  IF REO'D  CLOSURE TRIM (03-1362)  W/ FIXING SCREW (WS)  CS-5.5x32  © 300 O.C	R-PANEL LINER W/ FIXING SCREW (WS) CS-5.5×25 SS-5.5×28 @ 333 O.C ALONG PULIN/GIRT	STITCH SCREW (WS)————————————————————————————————————
EDGE TRIM (03-0274) W/ STITCH SCREW (WS) CS-4.8x16 SS-4.8x20 © 600 O.C TO PANEL  SIDEWALL LINER (TYPE-R)	FIXING SC CS-5.5x28 SS-5.5x28 TO PULIN	(03-0251)

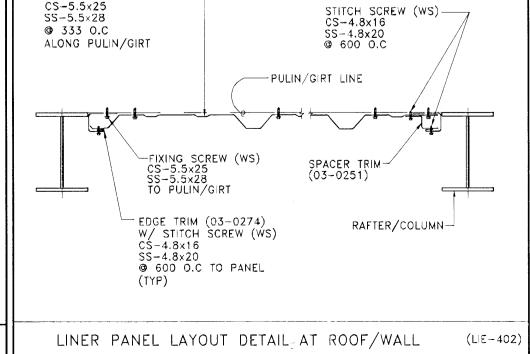

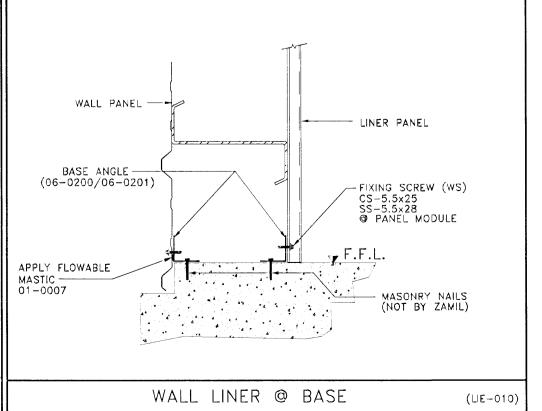

SELF DRILLING FASTENERS SCHEDULE @ WALL

CS-5.5×25 (01-0481)

CS-5.5x45 (01-0482)

CS-4.8x16 (01-0480)

CS-5.5×25 (01-0481)

CS-5.5×32 (01-0486)

FASTENER USAGE

FIXING SCREWS

STITCH SCREWS

FIXING SCREWS

WALL SCREW (WS)

GENERAL SCREW (GS)

FASTENER PART NUMBER

CARBON STEEL "CS"

IMPORTANT NOTES

1 – Wall Panels Type = TYPE-R Thickness = 0.5 (STEEL)

2 - Panels are to be field cut to suit openings

3 - Trims are provided in Zamil Steel standard lengths. Trims quantities are provided to cover the whole length of the trim using 50 mm end laps. Refer to detail TRE-010 at the roof sheeting plan. If lap length specified (50mm) is exceeded during erection then shortage in length may result. If the lap length is reduced then leakage and appearance problems may result.

= FROST WHITE

Always cut any excess trim length at the end of

## <sup>4 –</sup> <u>SITE STORAGE INSTRUCTIONS</u>

All products are dispatched from our factory in good condition. To maintain this condition, we recommend that the bundles of sheets, purlins or channels are stored 150mm clear of the ground, with a slope of 1:25, to allow for water drainage. Cover the stack with a waterproof cover, leaving the ends open to allow for air circulation.

Upon receipt, it is recommended that bundles of panels be checked. If any water is entrapped between sheets, the sheets should be carefully dried, and then re-stacked allowing for air circulation.

It is recommended that panels be installed as soon as possible after delivery. Extended site storage is not recommended.

Zamil Steel accepts no responsibility for staining of Galvanized, Zincalume or Aluminium products, or deterioration of Painted products due to incorrect site storage.

> Samþykkt þann 0 1 DEC 2008

Byggingafulltrúinn í Hafnarfirði F.h. Hrólfur S. Gunnlaugsson

0	08.10.07	ISSUED FOR APPROVAL	SAK	REM	RMR
1	27.11.2007	RE-ISSUED FOR APPROVAL	HKS	REN	RMR
2	18.03.2008	RE-ISSUED FOR APPROVAL	HKS	REN	ТММ
3	07.06.2008	ISSUED FOR CONSTRUCTION	ASU	AVP	ТММ



ENGINEERING DEPARTMENT

ZS JOB NO.	: V7-D568	BUILDING NO.:	: 01
PROJECT NAME	:SIBERIA HOUS	SE	
CUSTOMER	: HEDINN		
JOBSITE LOCATION	N: HAFNAFIRDI,	ICELAND	
DRAWING TITLE	:		DRAWING NO.

SIDEWALL LINER ELEVATION

E10