


FO#	LOC	MARK	LENGTH	THK	DEPTH
1	HEADR	CW122	1050	1.5 mm	216 mm
1	JAMBL	CW118	2094	1.5 mm	216 mm
1	JAMBR	CW118	2094	1.5 mm	216 mm

All Dimensions are millimeters [mm.] -Unless Noted

MARK	LENGTH	THK	DEPTH
JCG18	2320	1.5 mm	216 mm
JCG19	3857	1.5 mm	216 mm
JCG20	3937	1.5 mm	216 mm
JCG21	2240	1.5 mm	216 mm
JZG14	2320	1.5 mm	216 mm
JZG15	4346	1.5 mm	216 mm
JZG16	4426	1.5 mm	216 mm
JZG17	2240	1.5 mm	216 mm
JCG22	7393	3.0 mm	216 mm
JCG28	7393	1.9 mm	216 mm
JPGHW42	7393	1.5 mm	216 mm
JZG24	7882	1.5 mm	216 mm
JZG34	7876	1.5 mm	216 mm
JZG36	7869	1.5 mm	216 mm
JZG38	7882	1.5 mm	216 mm
JZG40	7882	1.9 mm	216 mm
JZG44	1504	1.7 mm	216 mm
JZG45	1504	1.5 mm	216 mm

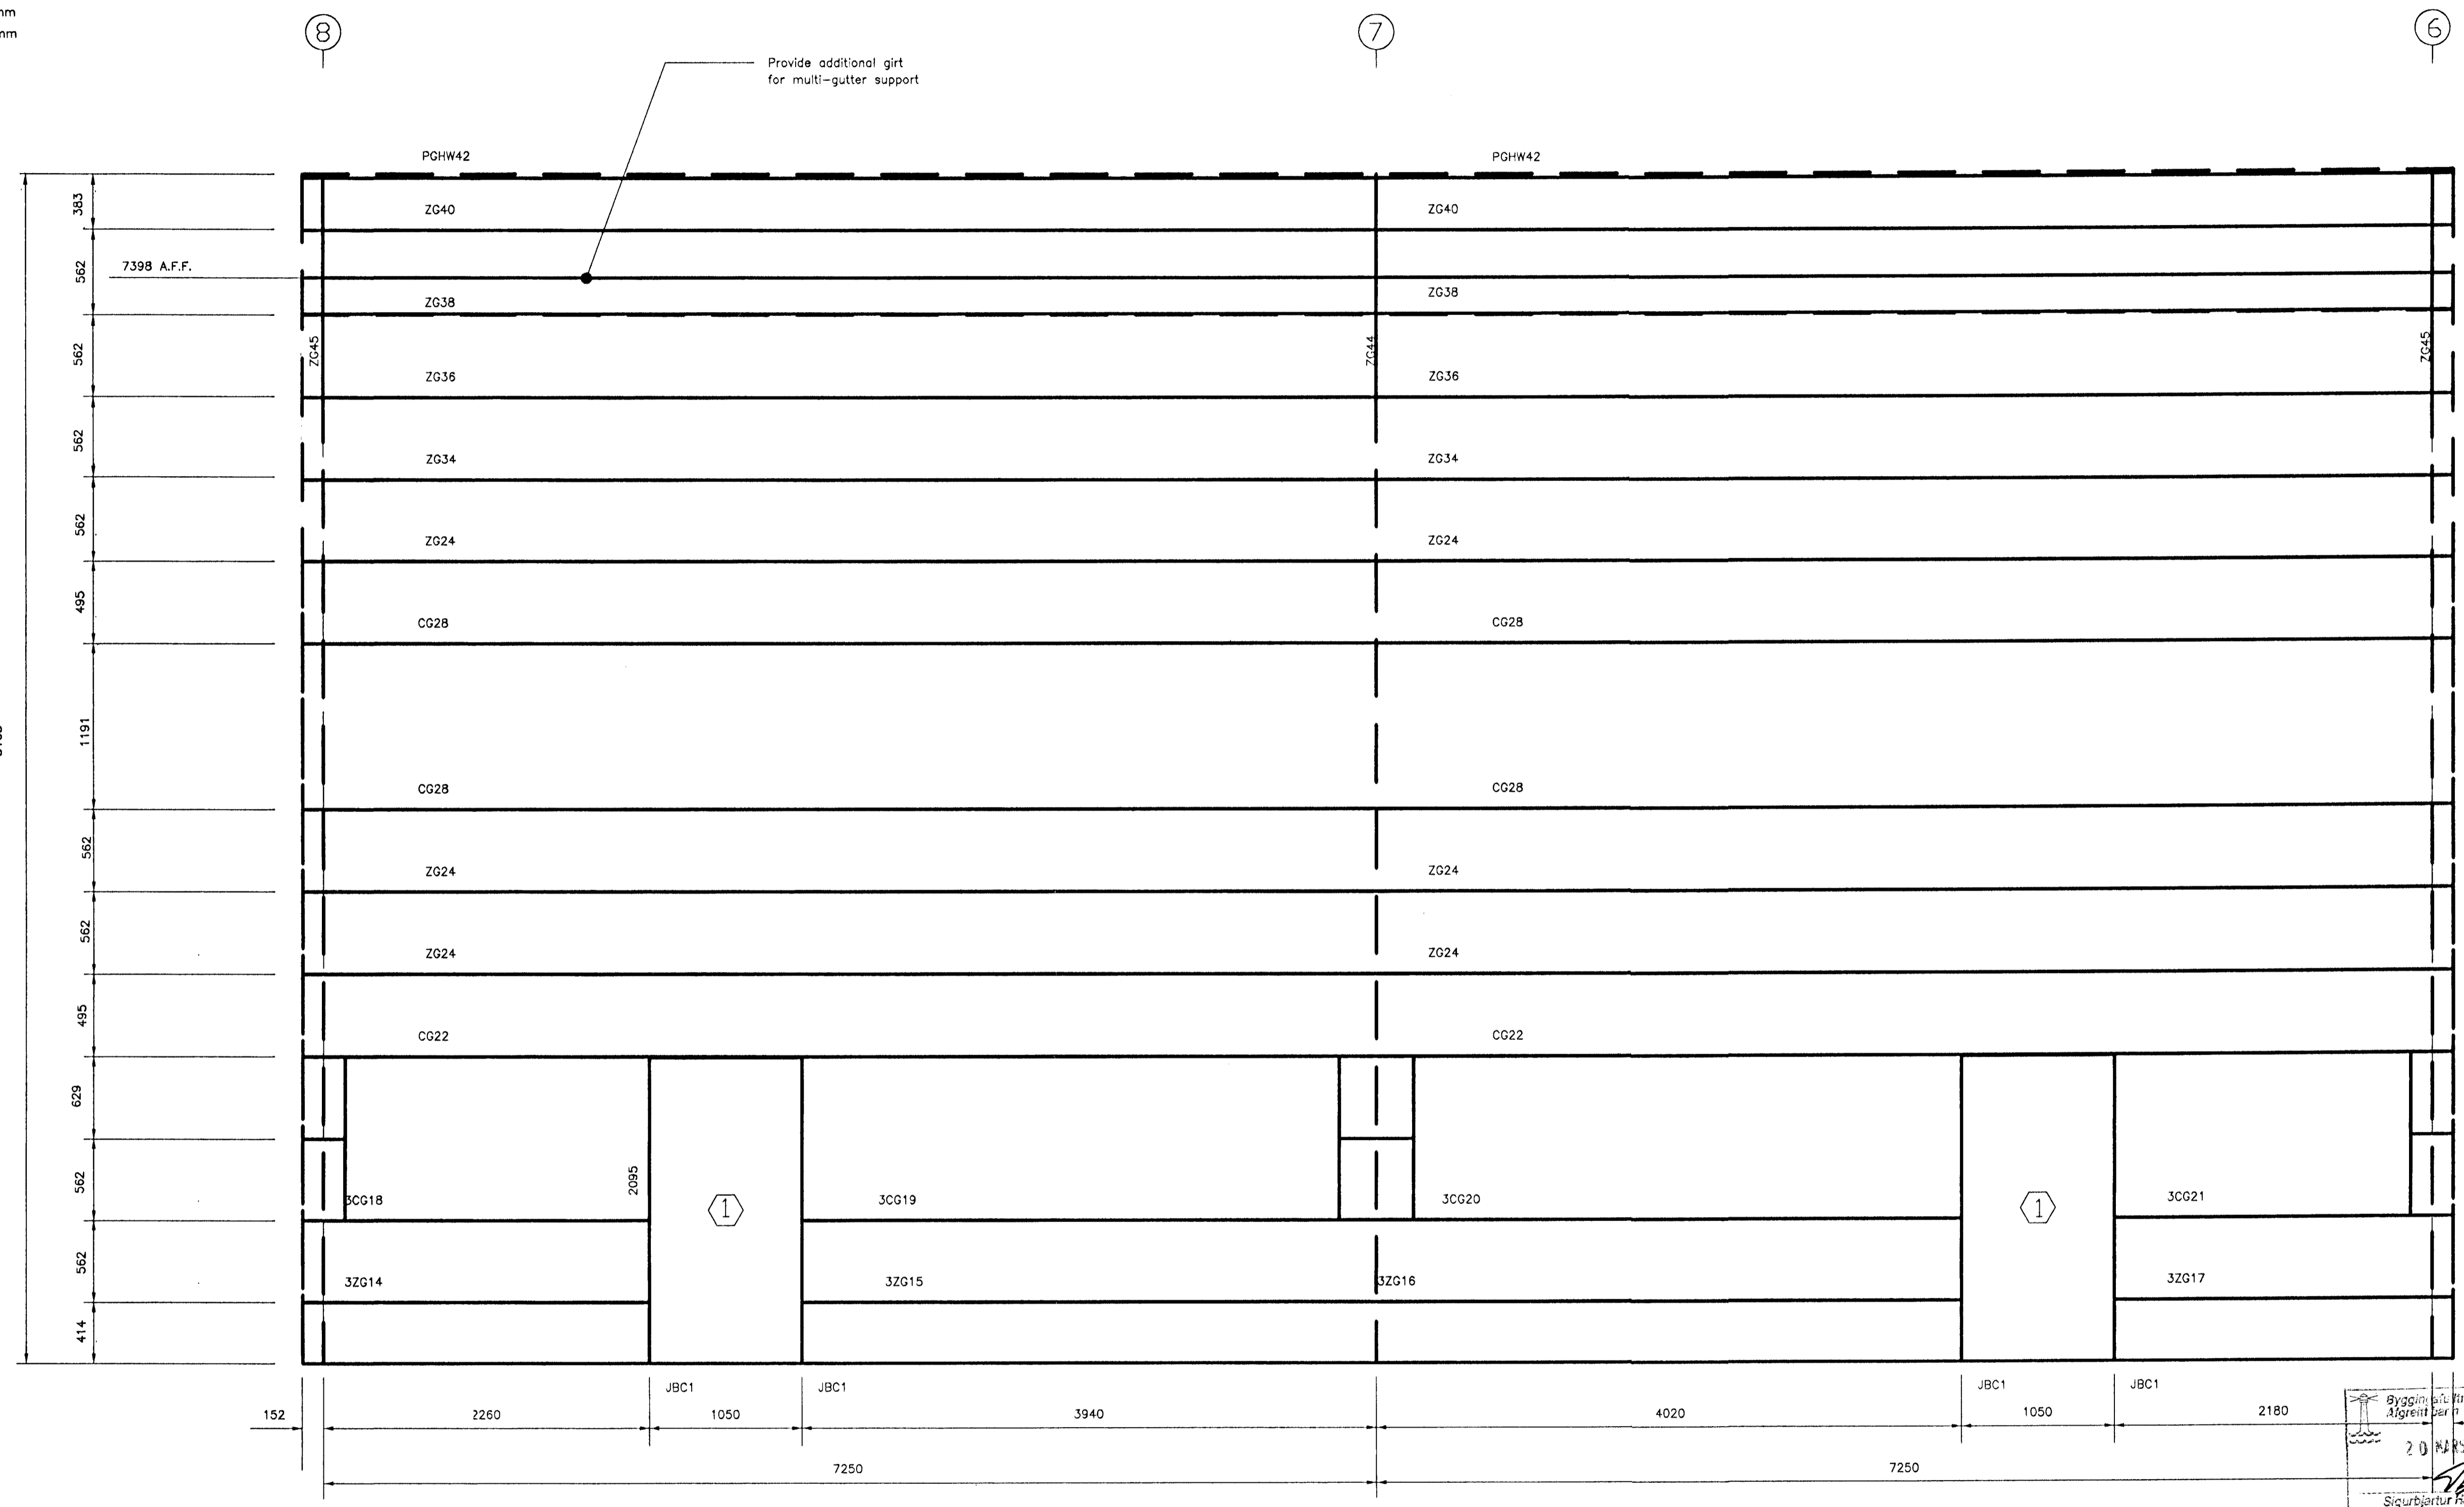

### NORTH WALL ELEVATION

SEE DETAIL S2 FOR GIRT TO COLUMN CONNECTIONS  
 SEE DETAIL S4 FOR GIRT CONNECTIONS AT CORNERS  
 SEE DETAIL S9 FOR PARAPET DETAIL ON NORTH AND SOUTH WALLS

This Drawing is Sealed only as to the Components furnished by VP Buildings

Verkfæðistofa Norðurlands ehf.  
 Hofsbót 4 600 Akureyri. kt. 560175-0869  
 Einkur Jónsson byggingaverkfr.  
 kt. 051045-4679  
 VERKFRÆÐISTOFA NORÐURLANDS ehf.

On: nasrv Projk: 4687 Bldg: 6 Plane: 3

1. UNLESS NOTED, USE 1/2" DIAMETER A-307 BOLTS FOR GIRT LAP, GIRT TO FRAME, FLANGE BRACE TO FRAME, FLANGE BRACE TO GIRT, JAMB AND HEADER CONNECTIONS. SEE JOB DETAILS FOR BOLT LENGTHS. 2. WIND AND FLANGE BRACING ARE AN INTEGRAL PART OF THE WALL STRUCTURAL SYSTEM AND SHOULD BE PROPERLY INSTALLED PRIOR TO ERECTION OF WALL AND ROOF SHEETS. REMOVAL OR ALTERATION OF WALL BRACING WITHOUT PRIOR AUTHORIZATION IS PROHIBITED.	Building Code: B6MBMA Live Ld(w/Trlo Red) 205 kgsm Coll. Ld (gravity): 24.4 kgsm Coll. Ld (uplift): 0.0 kgsm Wind Speed: 193 kmph Wind Exp. Cat.: C Ground Snow: 178.6 kgsm Roof Snow: 102.5 kgsm Snow Exp. Cat.: 3 Seismic Zone: 3 Building Use Cat.: 4 Auxiliary Loads: NONE	This Drawing, including the information hereon, remains the property of VP Buildings. It is provided for Erecting the Building described in the applicable Purchase Order and shall not be modified, reproduced or used for any other purpose without prior Written Approval of VP Buildings. The General Contractor and/or Erector is solely responsible for accurate, good quality workmanship in erecting this building in conformance with this Drawing, details referenced in this Drawing, all applicable VP Buildings Erection Details and all industry standards pertaining to proper erection, including the correct use of temporary bracing.	NORTH WALL ELEVATION (SECONDARY)		QUOTE #	JOB # P9924127																						
			<table border="1"> <thead> <tr> <th>REV</th> <th>DATE</th> <th>BY</th> <th>DESC.</th> <th>BUILDER</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td>CUSTOMER</td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td>LOCATION</td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td>PROJECT</td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td>BUILDING</td> </tr> </tbody> </table>	REV	DATE	BY	DESC.	BUILDER					CUSTOMER					LOCATION					PROJECT					BUILDING
REV	DATE	BY	DESC.	BUILDER																								
				CUSTOMER																								
				LOCATION																								
				PROJECT																								
				BUILDING																								