


ÞÓR GÍSLASON
BYGGINGATÆKNIFRÆÐINGUR

ÁLFHOLT 6 HAFNARFIRÐI

OFNASKRÁ

NR	HERBERGI	HÁMARKSSTÆRÐ OFNA LENGD - HÆÐ	AFKÖST VÖTT	TENGING
101	ANDDYRI	900-600	600	DA
102	GANGUR	1200-700	1200	BC
103	HERBERGI	1200-600	800	DA
104	SVEFNHERBERGI	1000-600	1000	DA
105	BAÐ	700-600	600	BC
106	ÞVOTTAHÚS	1000-600	600	BC
107	HERBERGI	1200-600	1000	BC
108	STOFA	1200-700	1400	BC
109	STOFA	1000-600	1200	DA
201	HERBERGI	1200-700	1200	BC
202	HERBERGI	1200-700	1200	DA
203	GANGUR	1000-600	1000	BC
204	SJÓNV.HERBERGI	1200-700	1700	DA
205	STOFA/ELDHÚS	1000-700	1400	BC
SAMTALS			14900	VÖTT

A  C
B D

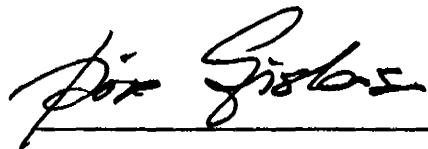

ÞÓR GÍSLASON

bls. 1

