


**SKYRINGAR:**

STEINSTEYPA:  
 SEMENTSMAGN SKAL VERA AMK 300 KG/M<sup>3</sup>  
 VATNSSEMENTSTALA SKAL VERA MINNI EN 0.55  
 LOFTINNIHALD SKAL VERA AMK. 5% ,  
 MELT EFTIR DÆLINGU.

BENDISTÁL ER KS. 40  
 ÖLL ÖNEFND MÁL ERU Í CM. NEMA KÖTAR Í M  
 MESTA ÁLAG Á GRUNN ER 0.12 MPa (1.2 KP/CM<sup>2</sup>)

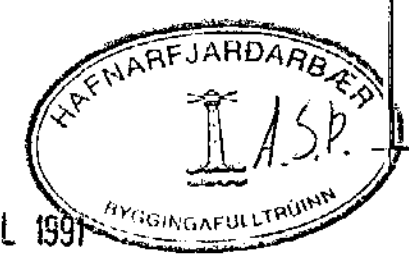

BREYTING 30.07.1991 GG 4/4

verkhelti	HÅBERG 13	nr. B 01
teikning	UNDIRSTÖÐLIR	dags. 19.08.1990
GÍSLI GUÐMUNDSSON MTFÍ		sk. 652252
yfirf.	hannað GG	teiknað GG
samb.	Gísli Guðmundsson	mkv. 1:50, 1:20