NOTE:

1ST FLOOR
EXTERIOR WALLS
TO BE
2x6 2445mm STUDS
INTERIOR WALLS
TO BE
2X4,2x6 2445mm STUDS
@ 406 O.C. UNLESS
SHOWN OTHERWISE.

EXTERIOR WALLS
SHEATHING TO BE
12.5mm PLYWOOD
INSTALLED VERTICALLY,
0mm FROM BOTTOM
PLATE.

-SHEATHING TO BE
GLUED & NAILED.

WALLS TO CONTAIN
2 TOP PLATES.
ATTACH 2nd TOP PLATE
@ SIDE.

BOTTOM PLATE TO BE
TREATED LUMBER.

HEADER TO BE
2-2x10

OPENINGS > 5' WIDE
=DOUBLE CRIPPLES

>< DENOTES
WALL PANEL JOINT
LOCATION

INTERIOR DOOR ROUGHT
OPENING HEIGHT TO BE
2083mm

BOTTOM PLATE TO BE
TREATED LUMBER

HB / XXXX / HS — BOTTOM OF HEADER; HEADER SIZE; SILL HEIGHT

EOR-001
unit 28

FIRST FL.
EXT. WALL
LAYOUT

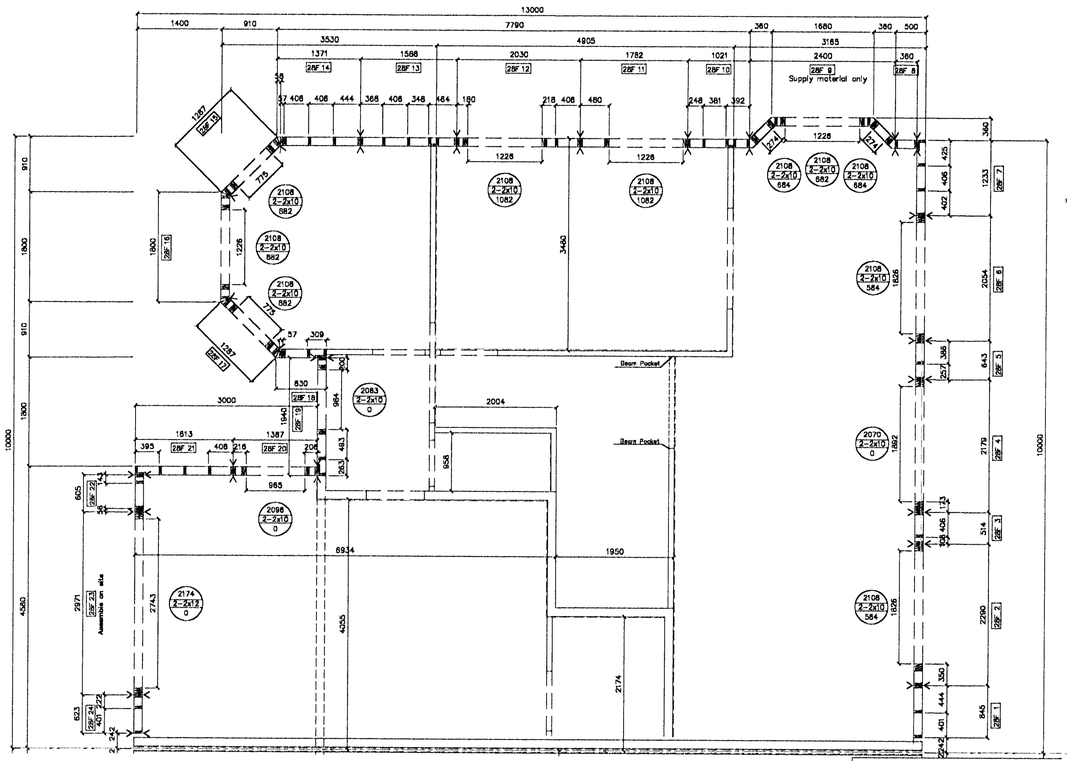


EOR-001 First Floor
unit 28 Exterior Wall

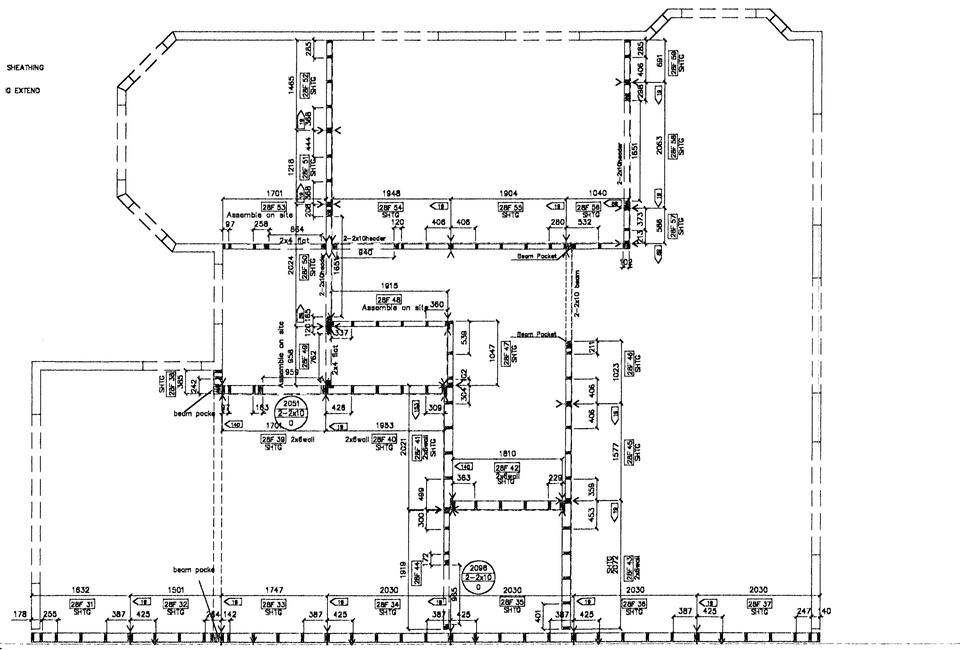


28F 31~37 : 2x6 PARTY WALL
APPLY SHEATHING

EOR-001 First Floor
unit 28 Interior Wall

NOTE:

1ST FLOOR
EXTERIOR WALLS
TO BE
2x6 2445mm STUDS
INTERIOR WALLS
TO BE
2X4,2x6 2445mm STUDS
@ 406 O.C. UNLESS
SHOWN OTHERWISE.

EXTERIOR WALLS
SHEATHING TO BE
12.5mm PLYWOOD
INSTALLED VERTICALLY,
0mm FROM BOTTOM
PLATE.

-SHEATHING TO BE
GLUED & NAILED.

WALLS TO CONTAIN
2 TOP PLATES.
ATTACH 2nd TOP PLATE
@ SIDE.

BOTTOM PLATE TO BE
TREATED LUMBER.

HEADER TO BE
2-2x10

OPENINGS > 5' WIDE
=DOUBLE CRIPPLES

>< DENOTES
WALL PANEL JOINT
LOCATION

INTERIOR DOOR ROUGHT
OPENING HEIGHT TO BE
2083mm

BOTTOM PLATE TO BE
TREATED LUMBER

HB / XXXX / HS — BOTTOM OF HEADER; HEADER SIZE; SILL HEIGHT

EOR-001
unit 26

FIRST FL.
EXT. WALL
LAYOUT

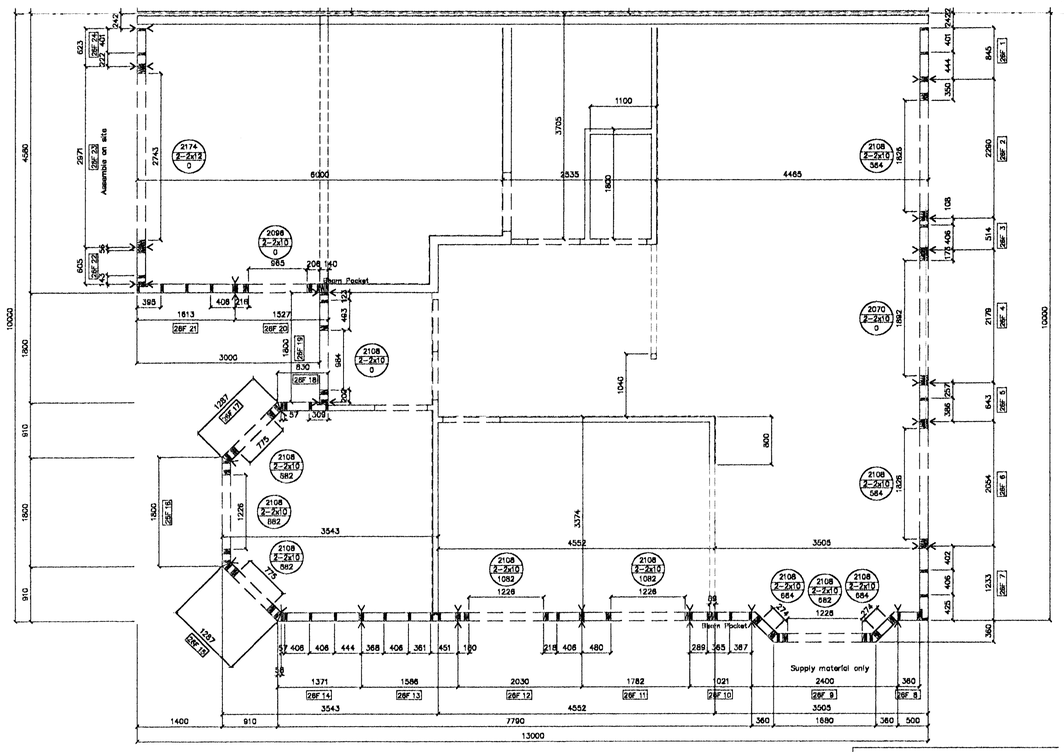


EOR-001 First Floor
unit 26 Exterior Wall

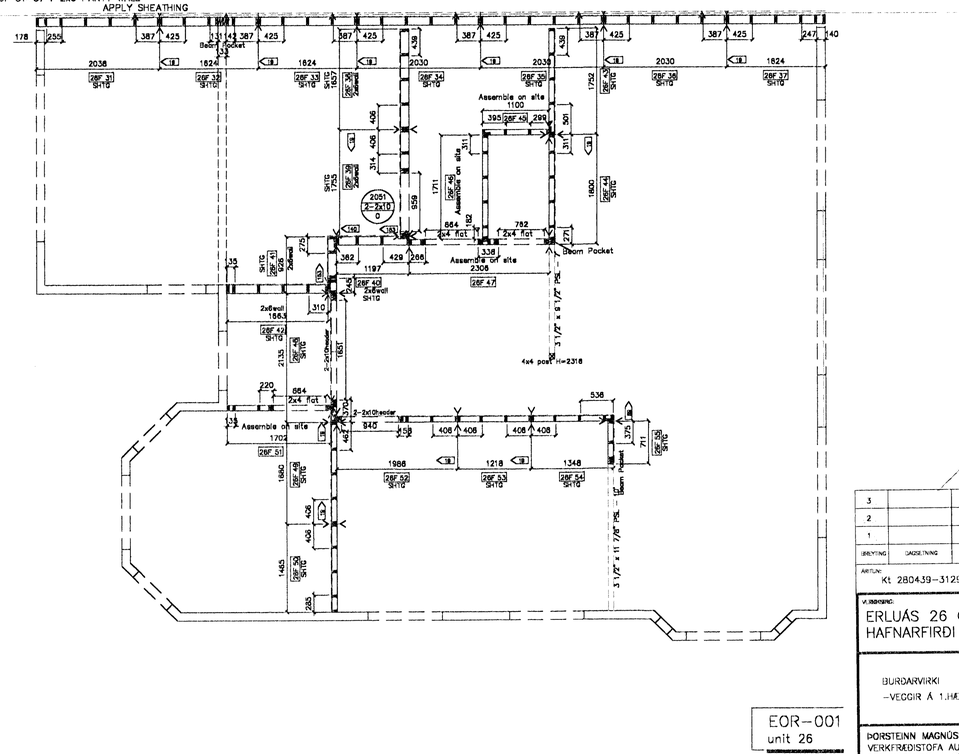


16F 31~37 : 2x6 PARTY WALL
APPLY SHEATHING

EOR-001
unit 26

VG

Kt 2804.39-3129

| | | | |
|---|---|---|---|
| 3 | | | |
| 2 | | | |
| 1 | | | |
| ÚTGÁFA | BREYTING | DAGSETNING | SKÝT |

VERKHEITI:
ERLUÁS 26 OG 28
HAFNARFIRÐI

VERK NR.: 0116

BURÐARVIRKI
-VEGGIR Á 1.HÆÐ, GRUNNMYND

| | |
|---|---|
| TEIKNAÐ: | ÞM |
| TEKNAÐ: | ÞG |
| DAGSETNING: | 08.02.2002 |
| KVARÐI: | 1:50 |
| YFIRFARIÐ: | ÞM |


ÞORSTEINN MAGNÚSSON – BYGGINGARVERKFRÆÐINGUR
VERKFRÆÐISTOFA AUÐBREKKU 6
200 KÓPAVOGI SÍMI 551 9940 FAX 551 9945


TEIKNING NR.: 204