


NR.	HITAFL. M <sup>2</sup>	RIFJA- FJÖLDI	BREIDD MM	HÆÐ MM	LENGD MM	GERÐ
101A	4,08	34	67	750	1700	NEO CLASSIC
101B	4,48	64	67	450	3200	-----
101C	6,00	50	67	750	2500	-----
102	3,00	25	67	750	1250	-----
103	1,68	14	67	750	700	-----
104	2,16	18	67	750	900	-----
106	1,44	12	67	750	600	-----
107	4,08	34	67	750	1700	-----
108	3,12	26	67	750	1300	-----
109	3,12	26	67	750	1300	-----
SAMTALS 33,16 M <sup>2</sup>						

OFNASTÆRDIR ERU MÍÐADAR VÍÐ 70<sup>0</sup> MÆDALVATNSHITA, SÉ UM ANNAD HITASTIG  
 EÐA HITAVEITU AD RÆÐA, ENDURSKODIST OFNASTÆRDIR. Á ALLA OFNA KOMI  
 TVÍSTILLILOKI OG LOFTTÆMINGARSKRÚFA.

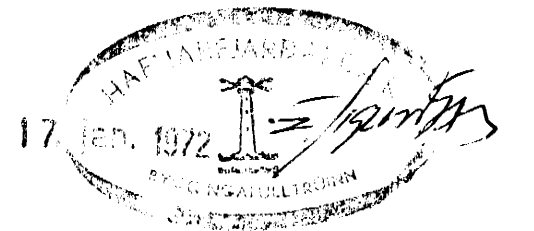

FLÓKKAHTA 5

HÖSNÆÐISMÁLASTOFNUN RÍKISINS

HITALÖGN KERFI I.  
 GRUNNMYND I. HÆÐAR

TVÍBÝLISHÚS

128a

MÁL 1:50

FEBR. 1966

*Sigurður P. Kristjánsson*