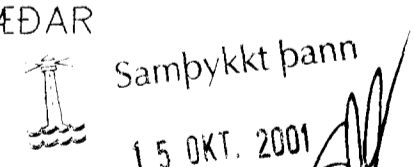



GRUNNMYND 1 HÆÐAR 1:50

OFN NR.	STAÐUR GAUKSÁS 2	HITAÞÖRF KCAL/H	MESTA LENGD	MESTA HÆÐ
101	FJÖLSK/STOFA	1,840	2100	400
102	ANDD	510	700	600
103	VS	350	500	600
104	BÍLGEYMSLA	1,880	1800	800
105	GEYMSLA	840	800	600
106	ÞVOTTUR	650	800	600
107	ELDHÚS	1,080	1000	600
108	FJÖLSK/STOFA	1,150	1800	400
201	HERB	1,470	1800	400
202	HJÓN	1,340	1400	600
203	FJÖLSK	590	800	400
204	BÁÐ	870	800	600
205	HERB	1,260	1400	600
206	FJÖLSK	1,010	1400	400
SAMTALS		14,440		

01	SEPT.01	HITALÖGNUM BR.	G.H.
Br.	Dags.	Eðl. preytinga	Sign
GAUKSÁS 4 HAFNARFIRÐI			
HITALAGNIR 1 HÆÐAR			
 Samþykkt þann 15 OKT. 2001			
MKV. 1:50			
DAGS. MARS 2001			
Byggingafræðingur í Hafnarfirði Eh. Sigurbjartur Halldórsson			
VERK NR. 2058			
TEIKN. NR. 2-03			
HANNAÐ SIG. ÞORLEIFSS. KT. 241148-3009			
TEIKNAD G.H.			
YFIRFARIÐ			
 TÆKNIÞJÓNUSTA SIGURDAR ÞORLEIFSSONAR ehf STRANDGÖTU 11 220 HAFNARFIRÐI Sími 555-4255 FAX 565-2875 E-mail taekniþjonusta@islandia.is			

Atk. 4/10/01
Atk