


OFNALISTI OFNKO R OFNAR					
OFN NR.	GERD	HÆD	LENGD	TENGING	AFKÖST $\Delta t$ 40°C
1	R33	350	2600	AD	1955 kcal/klst.
2	R20	630	1200	AB	830 -
3	R11	630	1200	AB	674 -
4	R22	630	1200	AB	1171 -
5	R20	630	1200	AB	830 -
6	R20	770	3200	AD	2650 -
7	R20	770	500	CD	414 -
8	R10	770	1000	AB	510 -
9	R10	630	500	CD	214 -
10	R10	630	500	CD	214 -
11	R21	630	1500	AB	1239 -

**SKÝRINGAR**

ALLAR OFNATENINGAR ERU  $\varnothing$  10 MM.  
 ALLIR OFNAR HAFI STILLITÉ  $\varnothing$  10 MM.  
 ALLIR OFNAR HAFI LOFTSKRÚFU.  
 ALLIR OFNAR HAFI SJALFVIRKA OFNLOKA T.D.  
 DANFOSS RA 2000, OFNLOKAR MERKTIR (R) ERU  
 BAKRENNSLUSLOKAR DANFOSS FJVR 10.

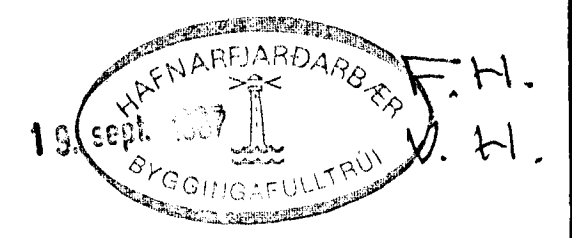

Mkv. 1:50	<b>TÆKNIJÓNUSTA RAGNARS KRISTINSSONAR</b> M.T.F.I.				<b>KVISTABERG 15</b>	
Vörpun 	Sérgræin: Hita hreinlætis og loftræstilagnir Grensásvegi 8 Reykjavík Vinnusími: 686088 Heimasími: 39013				GRUNNMYND OFNAKERFI	
Hannað R K	Tæknað P G	Yfirfarið	Samþykkt 	Dags. 10.87	Verknúmer	Teikninganúmer