


### OFNASKRÁ

OFN NR.	AFKÖST KCAL/KLST.	HAMARMS-		STADSETN. STÚTA	VALDIR OFNAR
		HÆÐ	LENGD		
01	490	60	150	C-B	
02	690			A-B	
03	380			A-B	
04	450			A-B	
05	1600	60	320	C-D	
06	990	~14	150	C-D	
07	200	60	80	A-B	
10	1350	55	300	A-B	
11	1850		300	C-D	
12	370			C-D	
13	700		~90	A-B	
14	700	70	150	A-B	
15	600		~90	C-D	
16	1000	70	150	A-B	
17	3250	55	300	C-D	
18	1550	55	~280	A-B	
20	2000	55	340	A-B	

17190


HITALÖGN SKAL VERA ÚR DREGNUM SVÖRTUM STÁLPÍPUM. ALLAR LEIÐSLUR SKAL EINANGRA MED 20 MM GLERULLAR-EDA PLASTHÓLKUM OG ÖJVEFJA MED PLASTDÚK.

STADSETNING STÚTA

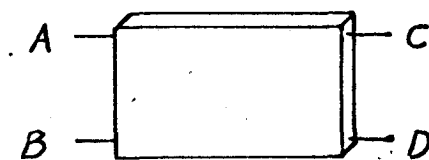

OFNASTÆRDIR SKULU MIDAST VID  $\Delta t = 40^{\circ}\text{C}$  SJÁLFVIRKUR OFN HITASTILLIR SKAL VERA Á BAKRENNISLISPIPU FRÁ ÖLLUM OFNUM (FJVR). ALLIR OFNSTÚTAR ERU  $\varnothing 10$  MM ( $\frac{3}{8}$ ") Á ALLA OFNA SKAL SETJA STILLITRÉ ÖÐRU MEGINN.

ÖBILT

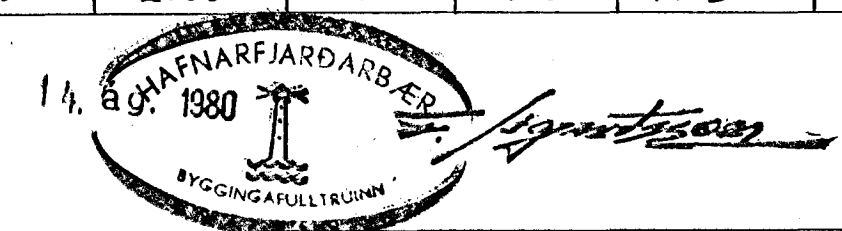

LÆKJARHVAMMUR 7, HAFNARFIRÐI VERK NR 1.17

HITALÖGN RÚMMYND M 1:50  
LOFTRÆSTISTOKKAR RÚMMYND

GUNNAR INGI RAGNARSSON • FVFI  
SKÓLAVÖRÐUSTÍG 19, REYKJAVÍK • SÍMI 27190  
L04  
JÚLÍ 1980