


TENGIMYND HITAVEITU

- | | |
|--------------------|--|
| 1. RENNILOKI | 8. ÖRYGGISLOKI |
| 2. SÍA | 9. AUTO (50 - 90 °C) |
| 3. HEMILL | 10. AUTO (20 - 60 °C) |
| 4. RENNSLISMÆLIR | 11. VARMASKIPTIR AFKÖST 20000 KCAL / T |
| 5. EINSTREYMISLOKI | 12. ÞENSLUKER |
| 6. ÞRÝSTIMÆLIR | 13. LOFTSKILJA .. |
| 7. HITAMÆLIR | 14. DÆLA |

OFNATAFLA $\Delta T = 40 \text{ }^\circ\text{C}$			
OFN	NR. 1	2000	KCAL / T.
"	" 2	2000	"
"	" 3	2000	"
"	" 4	2000	"
"	" 5	260	"
"	" 6	640	"
BLÁSARI	1	5000	KCAL / T
"	2	5000	"
HITI '1 GÖLFI		14000	KCAL / T
SAMTALS		33000	KCAL / T

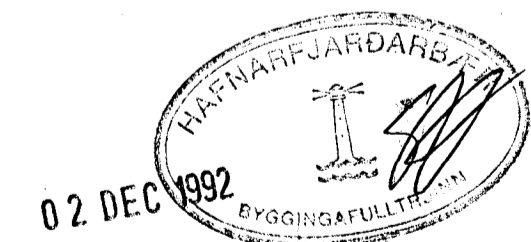

HAGVIRKI - KLETTUR <small>VERKTAKI VERKHÖNNUN</small>		Verk nr. K 20
<small>SKÚTAHRAUN 2 - 220 HAFNARFIRÐI - Sími 53999</small>		Teikning nr. 3.2
MELABRAUT 18, ÞVOTTASTÖÐ TENGIMYND OG OFNASKRÁ		Mælikvarði /
Hannað / <i>[Signature]</i>	Teiknað / <i>[Signature]</i>	Yfirfarið / <i>[Signature]</i>
Samþykkt / <i>[Signature]</i>		Dagsetning NOV. '92.