
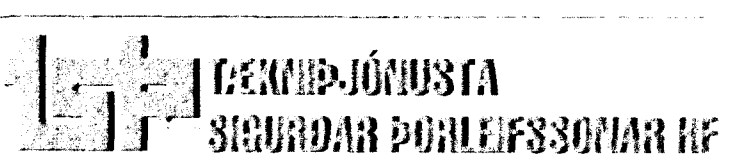


RÚMMYND - HITALAGNA \* 1:50

öfn nr.	Staðsetn	Hitaport kcal/h	Lengd MM	m. Hæð MM	henging
101	ANDD	500	900	600	C D
102	VS	200	700	600	C D
103	PVÖTTUR / G	200	900	600	C D
104	BOÐSTOFA	1030	1800	200	A D
105	STOFA	1630	2300	200	A D
106	BÍLG	1490	2000	600	B C
201	BAD	500	900	600	A B
202	HERB	1240	1800	600	C D
203	HERB	1050	1300	600	A B
204	PVÖTTUR / G	300	900	600	C D
205	FJOLSK	1530	1800	200	A D
206	HJÓN	1020	1300	600	A D
SAMTALS		11050			

ADUR EN OFNAR ERU PANTADIR SKULU ARKITEKT OG T.EKNIFFRÆÐINGUR  
YFIRFARA OFNATILBOÐIÐ  
STÆFD OFNA SKAL VERA SEM N.EST:  
HÆÐ = 20 SM LÆSRI EN HÆÐ FRA CÖLF OG UPPÍ SÖLBEKK  
LENGD = 10 - 15 SM STYTTRI EN GLUGGABREYDD

BR.		DAGS		08 MARS 1995		SIGN.	
							
<b>VÖRDUBERG 10</b> <b>HAFNARFJÖRÐI</b>							
RÚMMYND - HITALAGNA							
MKV. * 1:50							
DAGS. JÚNÍ '94							
VERK NR. 9425							
TEIKN NR. 2-05							
HANNAD							
TEIKNAD GH							
YFIRFARIÐ							
							
STRANDGÖTU 11 - 220 HAFNARFJÖRÐUR - SíM 54250 - FAX 652875							