


Covering Schedule

Id	Qty	Start Length	Qty	Length	Type	Gage	OP	Fin.	Color
#1	60	6701	60	5177	SSR	22	2	K	RW
#2	60	9629	60	11153	SSR	22	2	K	RW

Oper. Code: 2=SQ, SQ  
 Finish: K=KXL  
 Color: RW=Cool Regal White

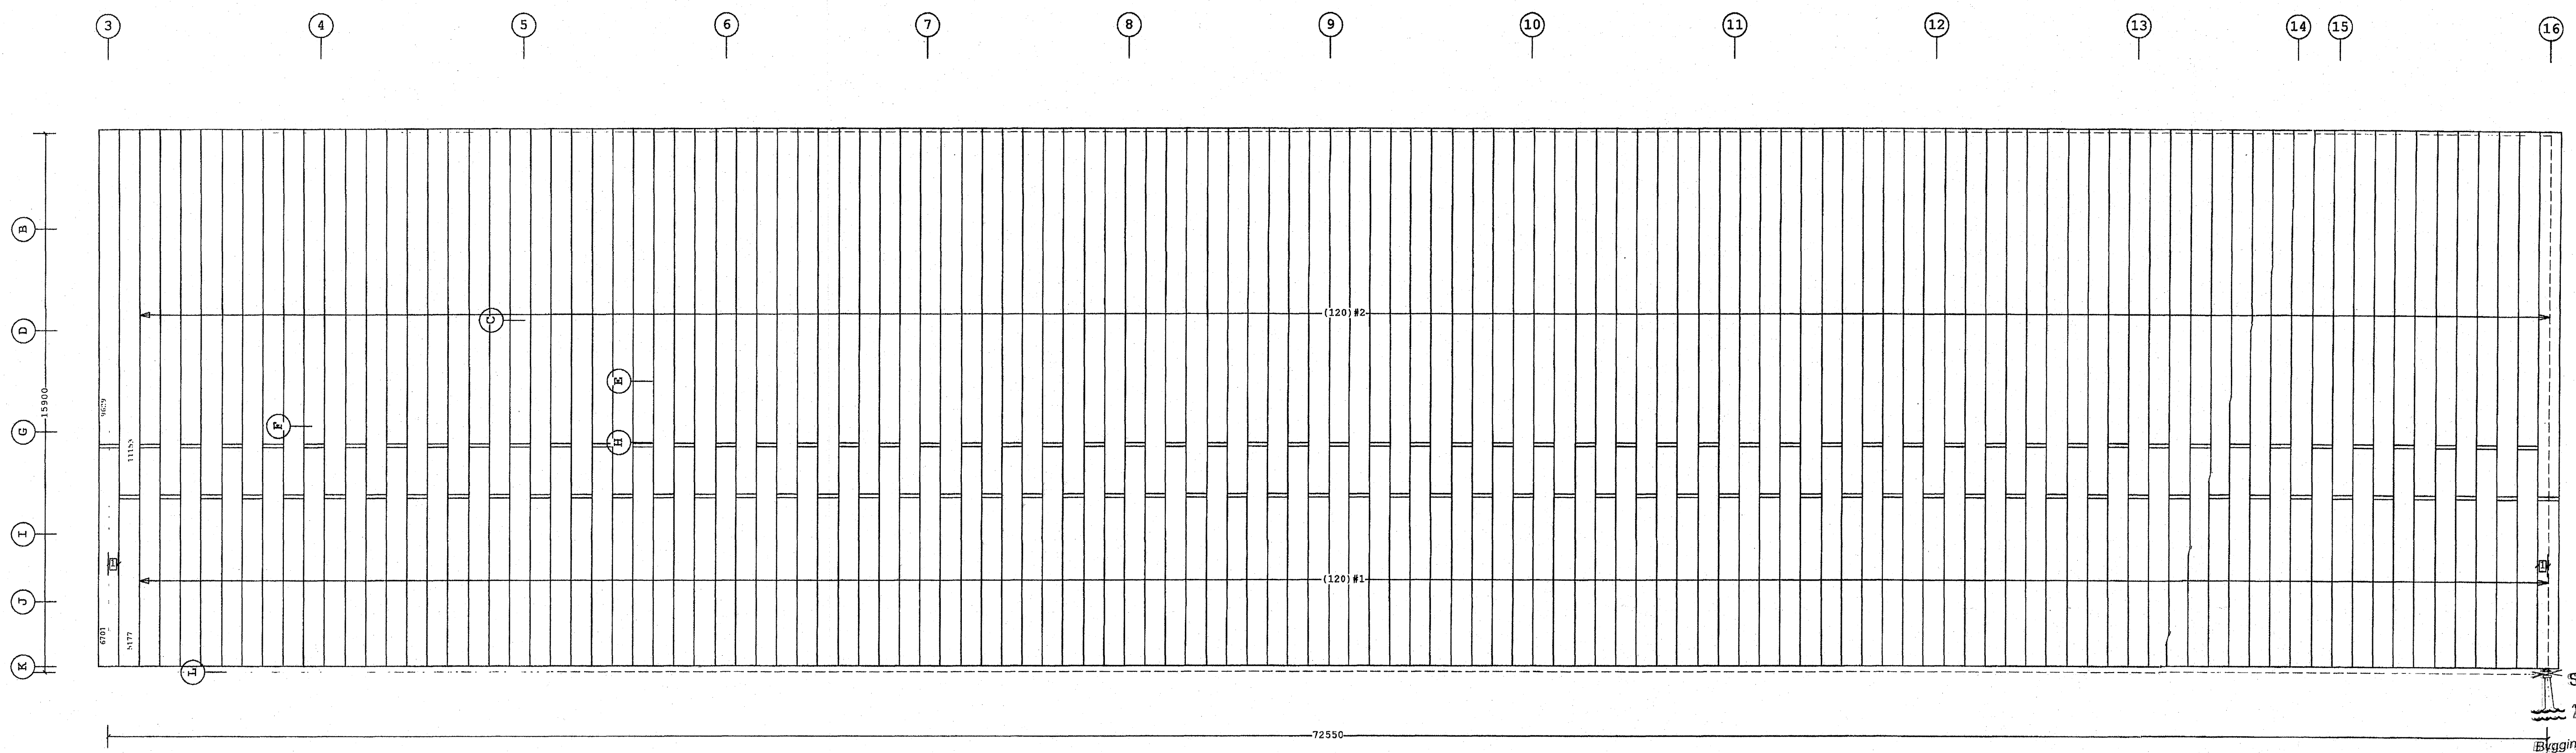

ROOF COVERING PLAN

Samþykkt þann 23 JAN, 2008  
 Byggingufulltrúinn í Hafnarfirði  
 F.h. Sigurbjartur Hallgrímsson

Accessory Schedule

Qty	Part	Detail
10	Tuflite Kit SSR UL90 w/ Pan (Left to Right)	RA01D2, RA01G4, RA01H1

Ice Damming Conditions Exist  
 - (Field Repair Fastener)  
 (1 bags) #55308 #17-14x1" S.S. Roof Fastener

1 309 Starter Panel (Cut Dim. = 334)  
 Dimension Key

EYKT  
 26 OCT 2007  
 MOTTEKID

**VSÓ RÁÐGJÖF**  
 Með áritun á uppdrátt þennan ábyrgist VSÓ Ráðgjöf ehf. kt. 681272-0979, að hönnun sé faglega unnin og í samræmi við lög og reglugerðir um byggingarmál.

Norðurhella 2 · 221 Hafnarfjörður

**FOR CONSTRUCTION**

VP Ref: Shape Name = Service Building

<p>1. PRE-DRILLING 1/8 DIAMETER HOLES FOR ROOF STRUCTURAL FASTENERS MAY BE REQUIRED AT 11 GAGE PURLINS, NESTED PURLINS, PURLIN LAP LOCATIONS, AND/OR SECONDARY STRUCTURAL BEAMS</p> <p>2. ROOF SHEETS ARE AN INTEGRAL PART OF THE STRUCTURAL SYSTEM, REMOVAL OR ALTERATION WITHOUT PRIOR AUTHORIZATION IS PROHIBITED.</p> <p>3. PANELS SHOWN WITH A LENGTH LESS THAN 1-0, 5-0 FOR SSR, MAY HAVE TO BE FIELD CUT.</p> <p>4. SEE JOB DETAILS FOR SHEETING AND TRIM FASTENER SPECIFICATION.</p>	<p>THE VP ENGINEER'S SEAL APPLIES ONLY TO THE WORK PRODUCT OF VP AND DESIGN AND PERFORMANCE REQUIREMENTS SPECIFIED BY VP. THE VP ENGINEER'S SEAL DOES NOT APPLY TO THE PERFORMANCE OR DESIGN OF ANY OTHER PRODUCT OR COMPONENT FURNISHED BY VP EXCEPT TO ANY DESIGN OR PERFORMANCE REQUIREMENTS SPECIFIED BY VP.</p>	<p>THIS DRAWING, INCLUDING THE INFORMATION HEREON, REMAINS THE PROPERTY OF VP BUILDINGS. IT IS PROVIDED SOLELY FOR ERECTING THE BUILDING DESCRIBED IN THE APPLICABLE PURCHASE ORDER AND SHALL NOT BE MODIFIED, REPRODUCED OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR WRITTEN APPROVAL OF VP BUILDINGS.</p> <p>THE GENERAL CONTRACTOR AND/OR ERECTOR IS SOLELY RESPONSIBLE FOR ACCURATE, GOOD QUALITY WORKMANSHIP IN ERECTING THIS BUILDING IN CONFORMANCE WITH THIS DRAWING, DETAILS REFERENCED IN THIS DRAWING, ALL APPLICABLE VP ERECTION GUIDES, AND INDUSTRY STANDARDS PERTAINING TO PROPER ERECTION, INCLUDING THE CORRECT USE OF TEMPORARY BRACING.</p>	<p>VP Buildings, Inc.                  3200 Players Club Circle Memphis TN 38125</p> <table border="1"> <thead> <tr> <th>REV</th> <th>DATE</th> <th>BY</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>NTS</p>	REV	DATE	BY	DESCRIPTION					<p><b>ROOF COVERING PLAN</b></p> <p>Norðurhella 2 - Hafnarfirði                  Grunnmynd þakklæðningar                  Bl. nr. 50</p> <table border="1"> <tr> <td>VP BUILDINGS VARCO-PRUDEN VPC VERSION: 5.6d</td> <td>                 JOB NO 07-4487                  DATE 8/9/07                  DRAWN/CHECK DJS / DJS                  PAGE 50             </td> </tr> </table>	VP BUILDINGS VARCO-PRUDEN VPC VERSION: 5.6d	JOB NO 07-4487 DATE 8/9/07 DRAWN/CHECK DJS / DJS PAGE 50
REV	DATE	BY	DESCRIPTION											
VP BUILDINGS VARCO-PRUDEN VPC VERSION: 5.6d	JOB NO 07-4487 DATE 8/9/07 DRAWN/CHECK DJS / DJS PAGE 50													

